Patch cord Outdoor Armored Duplex Stainless steel



Fiber Types :

Singlemode 9/125um
Multimode OM1 62.5/125um
Multimode OM2 50/125um
Multimode OM3 50/125um
Multimode OM4 50/125um

Features


- Good mechanical and environmental characteristics;
- Soft, flexible, solid, easy to splice , It's especially applied to optical long-distance,field, building wiring, trunking connectors;
- Flame retardant characteristics and the meet the requirements of relevant standards;
- Meet various requirements market and clients.



Connector Types.

Applications

- Used in indoor or outdoor;
- Used in all kinds of general optical;
- Use in pigtails and patch cords;
- Used in connectors in optical communication equipment rooms and optical distribution frames;
- Used as optical apparatus connection.

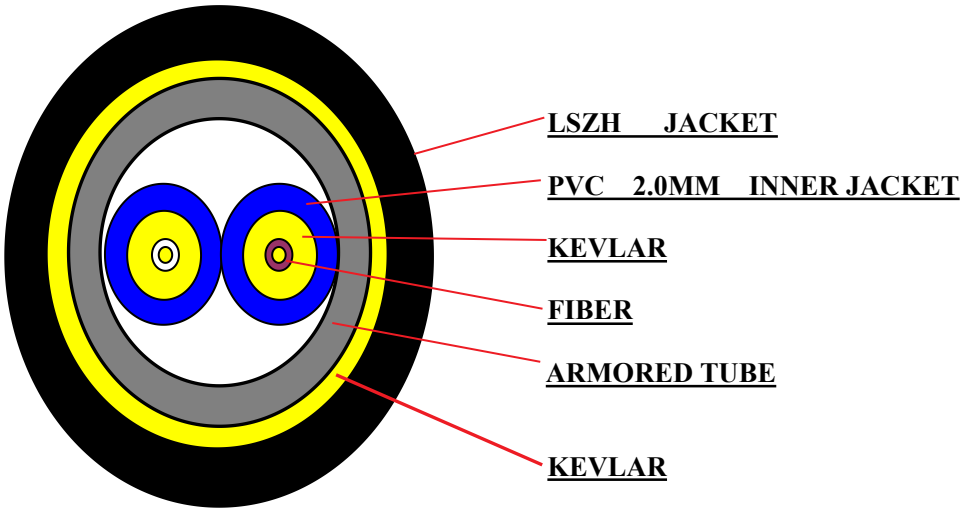

The dimension of the cable

Cable type	Cable Diameter mm	Stainless steel tube diameter mm	Tight-buffered fiber diameter mm
7.0GJSJZY	Φ7.0±0.3	Φ5.0±0.1	Φ0.9

Mechanical Specifications of the cable

Cable type	Cable Diameter (mm)	Cable weight KG/KM	Tensile N		Bend radius (mm)*		Crush N/100mm
			Short time	Long time	dynamic	static	
7.0GJSJV	Φ7.0±0.1	60	600	300	70	35	3000
Operating Temperature	-25℃ to +85℃						

- Material of buffer：PVC
- Material of jacket：LSZH
- Color of jacket：Black
- Armored tube：Stainless Steel

